

TPM Cap

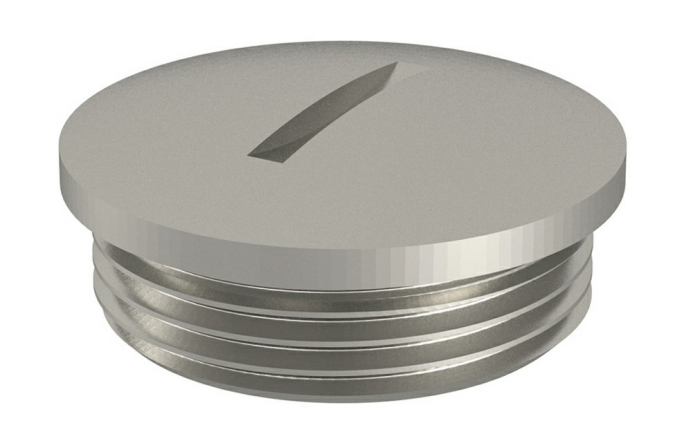

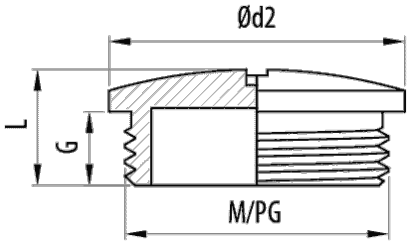

Description

TPM threaded metal plug with an IP68 index with the (not included) O-ring according to EN 60529. Available in metric thread from M12 to M63 and PG7 to PG48. Made of nickel-plated brass.

Advantages

Made of nickel-plated brass.

Protection index EN 60529: IP68 (with O-ring).

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for the capping of holes in boxes or electrical cabinets ensuring a degree of protection.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TPM Cap

Main technical characteristics

LTN | PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63

LATÓN NIQUELADO,NBR | IP68 | -25 / 90 °C | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC000032

Product data

PG 7	5.25	14	8	44010007	0,003	100
PG 9	6	17	9	44010009	0,005	100
PG11	6	20	9	44010011	0,007	100
PG13	6.5	22	9.5	44010013	0,009	100
PG16	6.5	24	9.5	44010016	0,011	100
PG21	7	30	11	44010021	0,021	100
PG29	8	39	12	44010029	0,019	50
PG36	9	50	15	44010036	0,018	25
PG42	10	57	16	44010042	0,030	25
PG48	10	64	16	44010048	0,023	10
M12	5	14	7	44011120	0,003	100
M16	6	18	8	44011160	0,005	100
M20	6.5	22	8.5	44011200	0,007	100
M25	7	27	10	44011250	0,011	100
M32	8	34	11	44011320	0,009	50
M40	9	44	13	44011400	0,009	25
M50	10	54	14.5	44011500	0,016	25
M63	10	67	15	44011630	0,191	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TPM Cap

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."