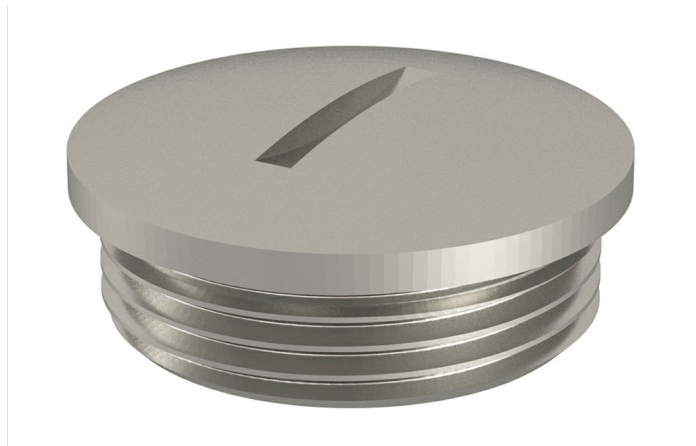


Description

TPM threaded metal plug with an IP68 index with the (not included) O-ring according to EN 60529. Available in metric thread from M12 to M63 and PG7 to PG48. Made of nickel-plated brass.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of nickel-plated brass.

Protection index EN 60529: IP68 (with O-ring).

Applications

Suitable for the capping of holes in boxes or electrical cabinets ensuring a degree of protection.

Solutions



Product data			
ETIM 10	EC000032	kg/u	0,009
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	25
Protection System	LTN	Material	LATÓN NIQUELADO,NBR
Finish	Nickel-plated brass	IP	IP68
M/PG	M40	Working temperature range (°C)	-25 / 90 °C
G (mm)	9	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
Ø d2 (mm)	44		
L (mm)	13		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic