


TPM AIR-INOX Cap

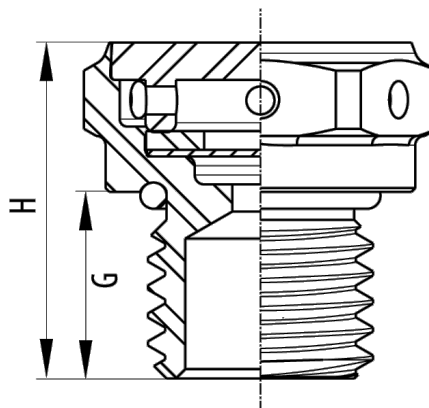

Description

Advantages

Applications

Solutions



Main technical characteristics

ETIM

Product data

Ⓢ	ⓕ	Ⓜ	Ⓢ	Ⓛ _{mm}	Ⓚ	Ref	kg/u	Ⓜ	Ⓜ	Ⓜ	Ⓜ	Ⓜ
INOX	Stainless Steel AISI 303	M12	10	18	17	44014120	0.014	100	Stainless steel AISI 303	IP68	-20 / 100 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
INOX	Stainless Steel AISI 303	M12	10	18	17	44014121	0.014	100	Stainless steel AISI 303	IP68	-20 / 100 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
INOX	Stainless Steel AISI 303	M12	10	18	17	44014122	0.014	100	Stainless steel AISI 303	IP68	-20 / 100 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
INOX	Stainless Steel AISI 303	M12	10	18	17	44014123	0.014	100	Stainless steel AISI 303	IP68	-20 / 100 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic