


Clamp I (Ref: 39095000)

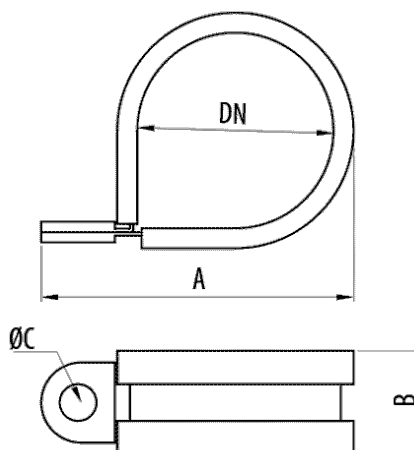

Description

Zinc plated steel clamp with elastomer profile for fixing conduits in cable management installations and for protection against vibrations. Available in different diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in various sizes: NW7, NW9, NW11, NW13, NW16, NW21, NW29, NW36 and NW48.

The NBR elastomer profile dampens vibrations.

Manufactured in PG protection system steel with a NBR elastomer profile.

Working temperature: -25°C to + 100°C.

Applications

Suitable for the surface fixing of TFA, TM, TM-PVC, Ecoflex® flexible conduits and Pemsaflex® in the management of electrical cables for general applications, building, tertiary and industrial sectors.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC011409	kg/u	0,035
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	100
Protection System	EZ	Material	ACERO CON PROT. SUPERFICIAL,NBR
Finish	EZ2, Electrogalvanised	Working temperature range (°C)	-25 / 120 °C
DN	NW 7	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
A (mm)	25		
B (mm)	12.5		
Ø C (mm)	4.2		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

