
Clamp I (Ref: 39095400)



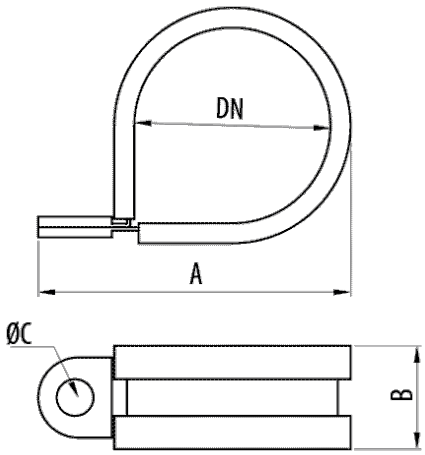

Description

Zinc plated steel clamp with elastomer profile for fixing conduits in cable management installations and for protection against vibrations. Available in different diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in various sizes: NW7, NW9, NW11, NW13, NW16, NW21, NW29, NW36 and NW48.

The NBR elastomer profile dampens vibrations.

Manufactured in PG protection system steel with a NBR elastomer profile.

Working temperature: -25°C to + 100°C.

Applications

Suitable for the surface fixing of TFA, TM, TM-PVC, Ecoflex® flexible conduits and Pemsaflex® in the management of electrical cables for general applications, building, tertiary and industrial sectors.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Clamp I (Ref: 39095400)

Product data

ETIM 10	EC011409
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Protection System	EZ
Finish	EZ2, Electrogalvanised
DN	NW17
A (mm)	40
B (mm)	15.5
Ø C (mm)	5.5

kg/u	0,093
u	100
Material	ACERO CON PROT. SUPERFICIAL,NBR
Working temperature range (°C)	-25 / 120 ºC
Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."