
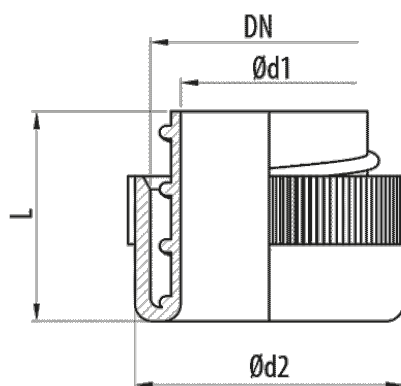


RP Plug

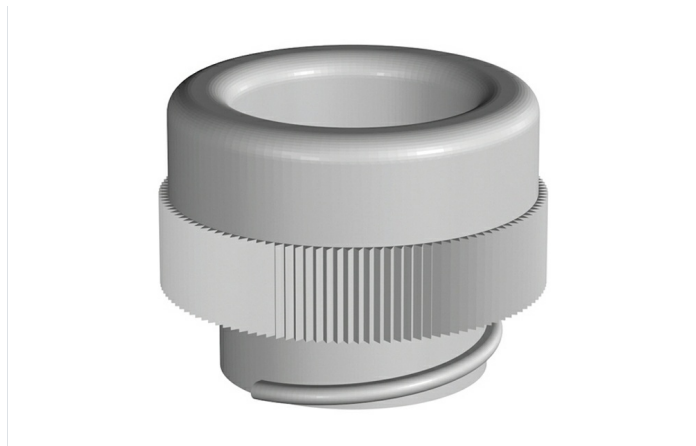

Description

RP bush made of grey coloured polyethylene (RAL 7035) for protection of the ends of flexible conduits. Available in several sizes.

Advantages

It protects the end of metal conduits to avoid any damage in the exit of the cables.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made from polypropylene, halogen free.

Applications

Suitable for placing on the ends of the TFA, TM, TM-PVC and Ecoflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions



Main technical characteristics

Colour	Grey RAL 7035	DN	NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48		 Polypropylene	 IP54	 -25 / 90 °C
	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA		ETIM 10 EC000519				

Product data

DN				Ref	kg/u	
NW 7	7.5	14.8	16	37003107	0,001	100
NW 9	9.3	18.1	18	37003109	0,001	100
NW11	12.1	21.9	19.1	37003111	0,002	100
NW13	13.6	24	19.1	37003113	0,002	50
NW16	15.5	25.5	21.8	37003116	0,002	50
NW21	20.2	32.2	24	37003121	0,004	25
NW29	26.7	42.2	25.3	37003129	0,007	20
NW36	34.8	53	30	37003136	0,014	10
NW48	45	65.7	38.3	37003148	0,023	5

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic