


RGp Swivel Connector

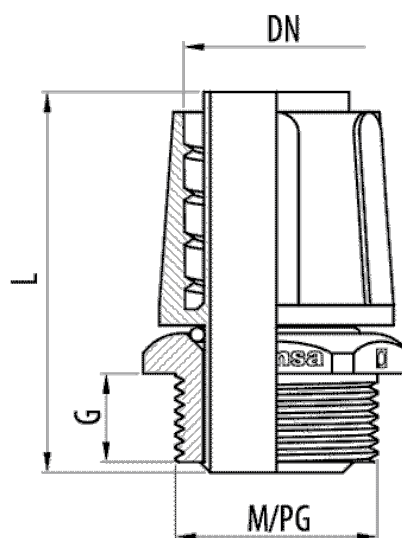

Description

Straight swivel connector made of halogen-free self-extinguishing polyamide 6 for the installation of plastic flexible conduits type TFA, Ecoflex® and TM-PVC. Rotating body that enables the connection of the conduit to the box. Available in metric and PG thread for various sizes of conduit, in grey RAL 7001.

Advantages

It has an independent rotating body that allows the connection of the fitting to the conduit for later connection to the box.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building, tertiary and industrial applications.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

Colour	Grey RAL 7001, Grey RAL 7035	DN	NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48				
	 PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M16, M20, M25, M32, M40, M50, M63		 Polyamide 6	 IP65	 -25 / 105 °C		
	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10	EC001178				

Product data

Colour	DN			L _{mm}		Ref	kg/u	
Grey RAL 7001	NW 7	PG 7	8	36	18	35010007	0,004	100
Grey RAL 7001	NW 9	PG 9	10	39	21	35010009	0,006	100
Grey RAL 7001	NW11	PG11	10	42	25	35010011	0,008	50
Grey RAL 7001	NW13	PG13	10	44	27	35010013	0,009	50
Grey RAL 7001	NW16	PG16	11	47	30	35010016	0,013	25
Grey RAL 7001	NW21	PG21	11	52	36	35010021	0,018	25
Grey RAL 7001	NW29	PG29	12.5	66	44	35010029	0,034	10
Grey RAL 7001	NW36	PG36	12.5	67	54	35010036	0,045	8
Grey RAL 7001	NW48	PG48	15	76	69	35010048	0,068	5
Grey RAL 7001	NW 9	M16	10	39	21	35011160	0,006	100
Grey RAL 7001	NW11	M20	10	42	25	35011200	0,008	50
Grey RAL 7001	NW13	M20	10	44	25	35011201	0,009	50
Grey RAL 7001	NW16	M25	11	47	30	35011250	0,013	25
Grey RAL 7001	NW21	M32	11	52	36	35011320	0,018	25
Grey RAL 7001	NW29	M40	12.5	66	44	35011400	0,034	10
Grey RAL 7001	NW36	M50	12.5	67	54	35011500	0,045	8
Grey RAL 7001	NW48	M63	15	76	69	35011630	0,068	5
Grey RAL 7035	NW 9	M16	10	39	21	35012160	0,006	100
Grey RAL 7035	NW11	M20	10	42	25	35012200	0,008	50
Grey RAL 7035	NW13	M20	10	44	25	35012201	0,009	50
Grey RAL 7035	NW16	M25	11	47	30	35012250	0,013	25
Grey RAL 7035	NW21	M32	11	52	36	35012320	0,018	25
Grey RAL 7035	NW29	M40	12.5	66	44	35012400	0,034	10
Grey RAL 7035	NW36	M50	12.5	67	54	35012500	0,045	8
Grey RAL 7035	NW48	M63	15	76	69	35012630	0,068	5

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising

- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic