


RGp Swivel Connector (Ref: 35011250)

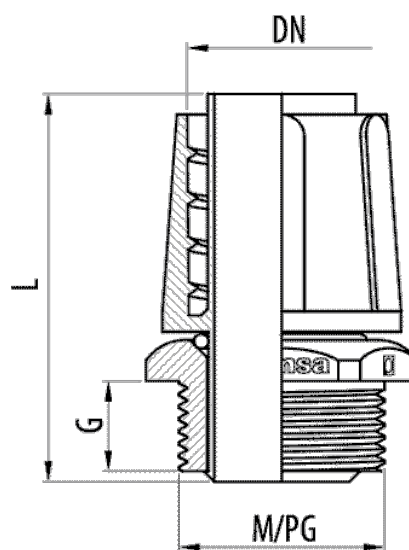

Description

Straight swivel connector made of halogen-free self-extinguishing polyamide 6 for the installation of plastic flexible conduits type TFA, Ecoflex® and TM-PVC. Rotating body that enables the connection of the conduit to the box. Available in metric and PG thread for various sizes of conduit, in grey RAL 7001.

Advantages

CE conformity to the 2014/35 directive and the IEC 61386 standard.

It has an independent rotating body that allows the connection of the fitting to the conduit for later connection to the box.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building, tertiary and industrial applications.

Solutions



RGp Swivel Connector (Ref: 35011250)

Product data			
Colour	Grey RAL 7001	kg/u	0.017
DN	NW16	u	25
M/PG	M25	Material	Poyamide 6
G (mm)	11	IP	IP65
L (mm)	47	Working temperature range (°C)	-25 / 105 °C
Torque wrench	30	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic