


RGp Swivel Connector (Ref: 35012500)

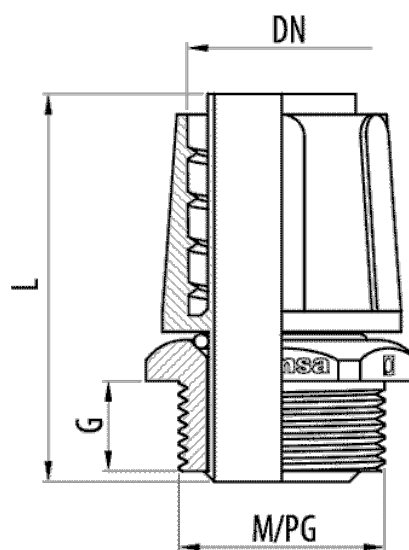

Description

Straight swivel connector made of polyamide 6 in grey colour with metric thread for the installation of TFA, Ecoflex® and TM-PVC conduits. Plug-in connection system and threaded on the other end. Body and nut in grey colour (RAL 7035).

Advantages

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials. Also available in dark grey RAL 7001.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Easy installation of fitting to a box thanks to its rotating body.

Protection index EN 60529: IP65.

Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building and industrial applications.

Solutions



Product data			
Colour	Grey RAL 7035	kg/u	0.056
DN	NW36	u	8
M/PG	M50	Material	Poyamide 6
G (mm)	12.5	IP	IP65
L (mm)	67	Working temperature range (°C)	-25 / 105 °C
Torque wrench	54	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic