


**RGp Swivel Connector** ( Ref: 35012630 )

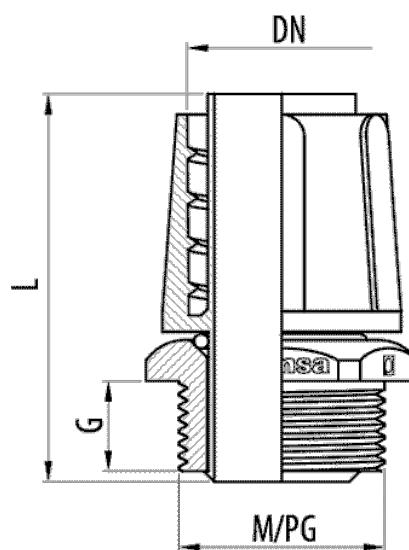

**Description**

Straight swivel connector made of polyamide 6 in grey colour with metric thread for the installation of TFA, Ecoflex® and TM-PVC conduits. Plug-in connection system and threaded on the other end. Body and nut in grey colour (RAL 7035).

**Advantages**

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials. Also available in dark grey RAL 7001.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Easy installation of fitting to a box thanks to its rotating body.

Protection index EN 60529: IP65.

**Applications**

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building and industrial applications.

**Solutions**



Product data			
Colour		Grey RAL 7035	
DN		NW48	
M/PG		M63	
G (mm)		15	
L (mm)		76	
Torque wrench		69	
kg/u		0.084	
u		5	
Material		Poyamide 6	
IP		IP65	
Working temperature range (°C)		-25 / 105 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic