


**RGp Swivel Connector** ( Ref: 35010021 )

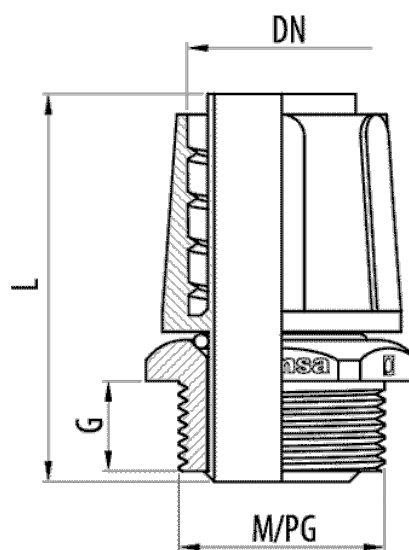

**Description**

Straight swivel connector made of halogen-free self-extinguishing polyamide 6 for the installation of plastic flexible conduits type TFA, Ecoflex® and TM-PVC. Rotating body that enables the connection of the conduit to the box. Available in metric and PG thread for various sizes of conduit, in grey RAL 7001.

**Advantages**

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has an independent rotating body that allows the connection of the fitting to the conduit for later connection to the box.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection index EN 60529: IP65.

Working temperature: -25°C to + 105°C.

**Applications**

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building, tertiary and industrial applications.

**Solutions**



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



**Rgp Swivel Connector** ( Ref: 35010021 )

**Product data**

|                                              |               |                                       |                                              |
|----------------------------------------------|---------------|---------------------------------------|----------------------------------------------|
| <b>ETIM 10</b>                               | EC001178      | <b>kg/u</b>                           | 0,018                                        |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> |               | <b>u</b>                              | 25                                           |
| <b>Colour</b>                                | Grey RAL 7001 | <b>Material</b>                       | Polyamide 6                                  |
| <b>DN</b>                                    | NW21          | <b>IP</b>                             | IP65                                         |
| <b>M/PG</b>                                  | PG21          | <b>Working temperature range (°C)</b> | -25 / 105 °C                                 |
| <b>G (mm)</b>                                | 11            | <b>Fire resistance</b>                | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| <b>L (mm)</b>                                | 52            |                                       |                                              |
| <b>Torque wrench</b>                         | 36            |                                       |                                              |

**Protection System**

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

**Insulating materials**

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

