
# RGp Swivel Connector ( Ref: 35012160 )



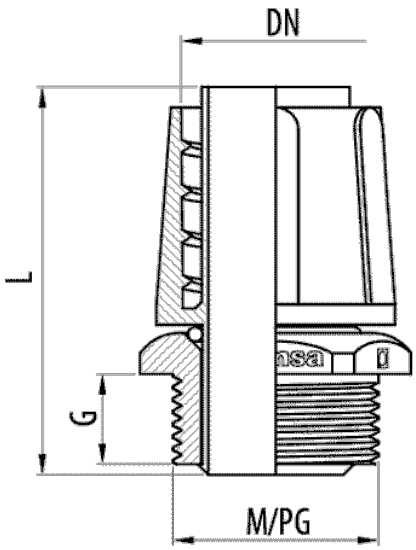


## Description

Straight swivel connector made of polyamide 6 in grey colour with metric thread for the installation of TFA, Ecoflex® and TM-PVC conduits. Plug-in connection system and threaded on the other end. Body and nut in grey colour (RAL 7035).

## Advantages

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials. Also available in dark grey RAL 7001.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Easy installation of fitting to a box thanks to its rotating body.

Protection index EN 60529: IP65.

## Applications

Suitable for the connection of TFA, TM-PVC and Ecoflex® flexible conduits, in the conduction of electrical cables for building and industrial applications.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# RGp Swivel Connector ( Ref: 35012160 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001178 | **kg/u** | 0,006 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **u** | 100 |
| **Colour** | Grey RAL 7035 | **Material** | Polyamide 6 |
| **DN** | NW 9 | **IP** | IP65 |
| **M/PG** | M16 | **Working temperature range (°C)** | -25 / 105 ºC |
| **G (mm)** | 10 | **Fire resistance** | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |
| **L (mm)** | 39 | | |
| **Torque wrench** | 21 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."