


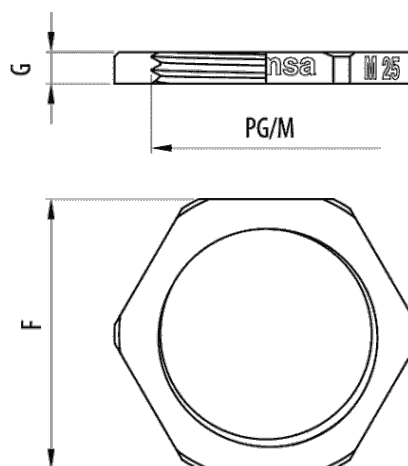

Description

Metal nut with M50 thread for connecting conduits, connectors and metal cable glands. Finished in .

Advantages

Applications

Solutions



Product data			
ETIM 10		EC000940	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	25
Protection System		LTN	
Finish		Nickel-plated brass	
M/PG		M50	
G (mm)		5	
Torque wrench		60	
		kg/u	0,028
		Material	Nickel-plated brass
		Working temperature range (°C)	-45 / 150 °C
		Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic