


TCP Nut

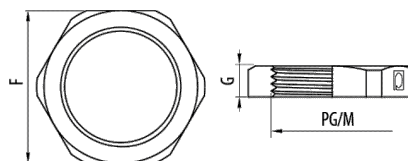

Description

Halogen-free polyamide 6 nut in metric and PG threads and in various colours, grey (RAL 7035), dark grey (RAL 7001) and black (RAL 9005) for connection of fittings and threaded items for plastic rigid, corrugated and flexible conduit systems.

Advantages

Compatible with metric or PG plastic threaded fittings for all ranges of rigid, flexible and corrugated conduits.

Available in Grey RAL 7035, dark grey RAL 7001 and black RAL 9005.

Working temperature: -25°C to + 105°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Applications

Suitable for connection of threaded fittings of all ranges of rigid and flexible plastic conduits for the conduction of electric cables in building and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

Colour	Grey RAL 7035, Black RAL 9005, Grey RAL 7001				
	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG42, PG48, M12, M16, M20, M25, M32, M40, M50, M63			 Polyamide 6	 -25 / 105 °C
	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10	EC000940		

Product data

Colour				Ref	kg/u	
Grey RAL 7035	PG 7	5	19	40020007	0,001	100
Grey RAL 7035	PG 9	5	22	40020009	0,002	100
Grey RAL 7035	PG11	5	24	40020011	0,001	100
Grey RAL 7035	PG13	6	27	40020013	0,002	100
Grey RAL 7035	PG16	6	30	40020016	0,003	100
Grey RAL 7035	PG21	7	36	40020021	0,003	100
Grey RAL 7035	PG29	7	46	40020029	0,006	50
Grey RAL 7035	PG36	8	60	40020036	0,013	25
Grey RAL 7035	PG42	8	65	40020042	0,013	25
Grey RAL 7035	PG48	8	70	40020048	0,014	25
Grey RAL 7035	M12	5	18	40021120	0,001	100
Grey RAL 7035	M16	5	22	40021160	0,001	100
Grey RAL 7035	M20	6	26	40021200	0,002	100
Grey RAL 7035	M25	6	32	40021250	0,005	100
Grey RAL 7035	M32	7	41	40021320	0,005	50
Grey RAL 7035	M40	7	50	40021400	0,007	25
Grey RAL 7035	M50	8	60	40021500	0,010	25
Grey RAL 7035	M63	8	75	40021630	0,016	25
Black RAL 9005	PG 7	5	19	40024007	0,001	100
Black RAL 9005	PG 9	5	22	40024009	0,002	100
Black RAL 9005	PG11	5	24	40024011	0,001	100
Black RAL 9005	PG13	6	27	40024013	0,002	100
Black RAL 9005	PG16	6	30	40024016	0,003	100
Black RAL 9005	PG21	7	36	40024021	0,003	100
Black RAL 9005	PG29	7	46	40024029	0,006	50
Black RAL 9005	PG36	8	60	40024036	0,013	25
Black RAL 9005	PG48	8	70	40024048	0,014	25
Black RAL 9005	M12	5	18	40025120	0,001	100
Black RAL 9005	M16	5	22	40025160	0,001	100
Black RAL 9005	M20	6	26	40025200	0,002	100
Black RAL 9005	M25	6	32	40025250	0,005	100
Black RAL 9005	M32	7	41	40025320	0,005	50
Black RAL 9005	M40	7	50	40025400	0,007	25

Colour				Ref	kg/u	
Black RAL 9005	M50	8	60	40025500	0,010	25
Black RAL 9005	M63	8	75	40025630	0,016	25
Grey RAL 7001	PG 7	5	19	40026007	0,001	100
Grey RAL 7001	PG 9	5	22	40026009	0,002	100
Grey RAL 7001	PG11	5	24	40026011	0,001	100
Grey RAL 7001	PG13	6	27	40026013	0,002	100
Grey RAL 7001	PG16	6	30	40026016	0,003	100
Grey RAL 7001	PG21	7	36	40026021	0,003	100
Grey RAL 7001	PG29	7	46	40026029	0,006	50
Grey RAL 7001	PG36	8	60	40026036	0,013	25
Grey RAL 7001	PG42	8	65	40026042	0,013	25
Grey RAL 7001	PG48	8	70	40026048	0,014	25
Grey RAL 7001	M12	5	18	40027120	0,001	100
Grey RAL 7001	M16	5	22	40027160	0,001	100
Grey RAL 7001	M20	6	26	40027200	0,002	100
Grey RAL 7001	M25	6	32	40027250	0,005	100
Grey RAL 7001	M32	7	41	40027320	0,005	50
Grey RAL 7001	M40	7	50	40027400	0,007	25
Grey RAL 7001	M50	8	60	40027500	0,010	25
Grey RAL 7001	M63	8	75	40027630	0,016	25

Protection System

CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS

PVC

PP

PA6

PA12

PU

PE

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

TCP Nut

- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

