


RGC Clamp

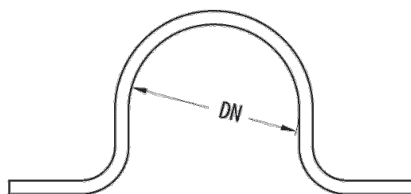

Description

GC Protection System steel clamp available in various diameters for fixing rigid metal conduits. Fixing to the wall with screws. Available in different diameters.

Advantages

Available in various sizes: NW16, NW20, NW25, NW32, NW40, NW50 and NW63.

Working temperature: -45°C to + 400°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in GC protection system steel (standard EN ISO 1461), suitable for outdoor installations and in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for fixing RLGC and RRGc hot dip galvanised rigid metal conduits in installations that require high mechanical performance and high resistance to corrosion. For building applications. Tertiary and industrial sectors with high security requirements. Premises of public attendance or with risk of fire or explosion. Installation in outdoor and aggressive environments.

Solutions



Main technical characteristics

 GC	 NW16, NW20, NW25, NW32, NW40, NW50, NW63	 Steel with surface coating	 -45 / 400 °C
 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000127		

Product data

DN	Ref	kg/u	
NW16	55032116	0,010	100
NW20	55032120	0,010	100
NW25	55032125	0,014	100
NW32	55032132	0,018	100
NW40	55032140	0,027	50
NW50	55032150	0,034	50
NW63	55032163	0,039	50

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic