


RGC Stand off Clamp (Ref: 55033120)

1/2

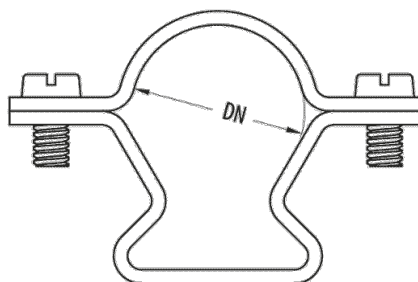

Description

GC Protection System carbon steel stand off clamp available in several diameters for fixing rigid metal conduits. Fixing with screws. It has a foot that allows separation of the conduit from the floor or wall.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has a foot that allows the conduit to stand off from the floor or wall.

Available in various sizes: NW16, NW20, NW25, NW32, NW40, NW50 and NW63.

Manufactured in GC protection system steel (standard EN ISO 1461), suitable for outdoor installations and in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Working temperature: -45°C to + 400°C.

Applications

Suitable for fixing RLGC and RRGc hot dip galvanised rigid metal conduits in installations that require high mechanical performance and high resistance to corrosion. For building applications. Tertiary and industrial sectors with high security requirements. Premises of public attendance or with risk of fire or explosion. Installation in outdoor and aggressive environments.

Solutions



ETIM 10	EC000127	u	50
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-45 / 400 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
DN	NW20		
kg/u	0,034		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

