


**RGC Stand off Clamp** ( Ref: 55033163 )

1/2

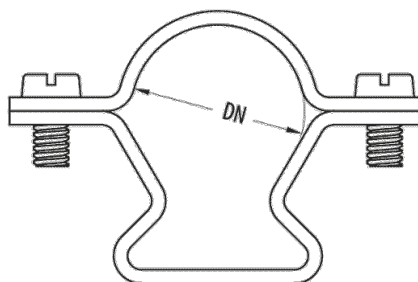

### Description

GC Protection System carbon steel stand off clamp available in several diameters for fixing rigid metal conduits. Fixing with screws. It has a foot that allows separation of the conduit from the floor or wall.

### Advantages

CE conformity to the 2014/35 directive and the IEC 61386 standard.

It has a foot that allows the conduit to stand off from the floor or wall.

Available in various sizes: NW16, NW20, NW25, NW32, NW40, NW50 and NW63.

Manufactured in GC protection system steel (standard EN ISO 1461), suitable for outdoor installations and in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Working temperature: -45°C to + 400°C.

### Applications

Suitable for fixing RLGC and RRGc hot dip galvanised rigid metal conduits in installations that require high mechanical performance and high resistance to corrosion. For building applications. Tertiary and industrial sectors with high security requirements. Premises of public attendance or with risk of fire or explosion. Installation in outdoor and aggressive environments.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
Protection System	GC	u	20
Finish	HDG, Hot Dip Galvanised	Material	Steel with surface coating
DN	NW63	Working temperature range (°C)	-45 / 400 °C
kg/u	0.080	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic