
CLIP II



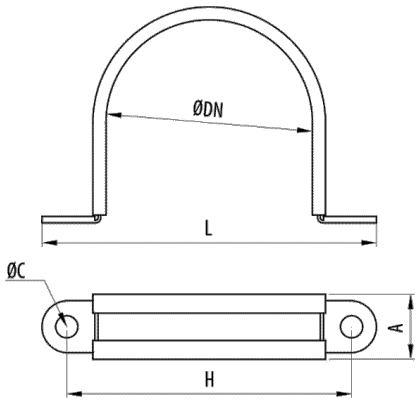

Description

Zinc plated steel clamp with elastomer profile for fixing Macroflex® NW70 and NW95 conduits that protects it from vibrations.

Advantages

Manufactured in PG protection system steel with a NBR elastomer profile.

Available in various sizes.

Working temperature: -25°C to + 90°C.

Protect from vibrations.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

CLIP II

Main technical characteristics

Ⓢ EZ | Ⓕ EZ2, Electrogalvanised | DN NW70, NW95 | $A_{(mm)}$ 25 | 10 | Ⓜ ACERO CON PROT. SUPERFICIAL,NBR

-15 / 120 °C | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC000127

Product data

DN	$L_{(mm)}$	$C_{(mm)}$	$H_{(mm)}$	REF	kg/u
NW70	131	8.2	112	33090270	0,059
NW95	150	8.3	132	33090295	0,075

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."