CLIP II (Ref: 33090270)



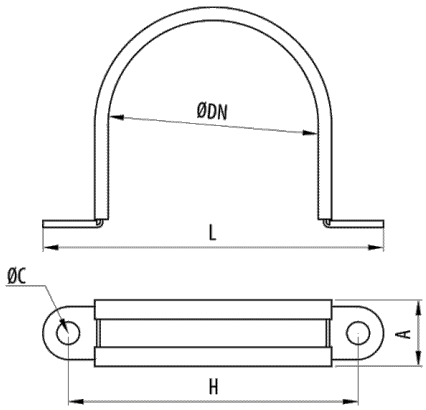

Description

Zinc plated steel clamp with elastomer profile for fixing Macroflex® NW70 and NW95 conduits that protects it from vibrations.

Advantages

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Available in various sizes.

Manufactured in PG protection system steel with a NBR elastomer profile.

Protect from vibrations.

Working temperature: -25°C to + 90°C.

Applications

Suitable for fixing large diameter Pemsaflex® and Macroflex® conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

CLIP II (Ref: 33090270)

Product data

ETIM 10	EC000127
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Protection System	EZ
Finish	EZ2, Electrogalvanised
DN	NW70
L (mm)	131
A (mm)	25
Ø C (mm)	8.2

H (mm)	112
kg/u	0,059
u	10
Material	ACERO CON PROT. SUPERFICIAL,NBR
Working temperature range (°C)	-15 / 120 ºC
Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."