


Conection Coupler (Ref: 55007016)

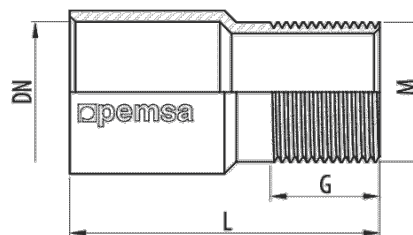

Description

EZ Protection System steel coupler for the connection of RL conduits to boxes in installations requiring high mechanical performance and medium resistance to corrosion. IP44 protection index. It incorporates a threaded end to the RL conduit for its connection to boxes together with a TCM nut. Available in different diameters.

Advantages

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

It has a threaded end for the connection of RL rigid conduit to boxes.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Protection index EN 60529: IP44.

Working temperature: -45°C to + 400°C.

Applications

Suitable for the connection of RL and RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



Product data			
ETIM 10		EC000939	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	50
Protection System		EZ	
Material		Steel with surface coating	
Finish		EZ2, Electrogalvanised	
IP		IP44	
DN		NW16	
Working temperature range (°C)		-45 / 400 °C	
M/PG		M16	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	
G (mm)		15	
Ø d2 (mm)		20.1	
L (mm)		44	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic