
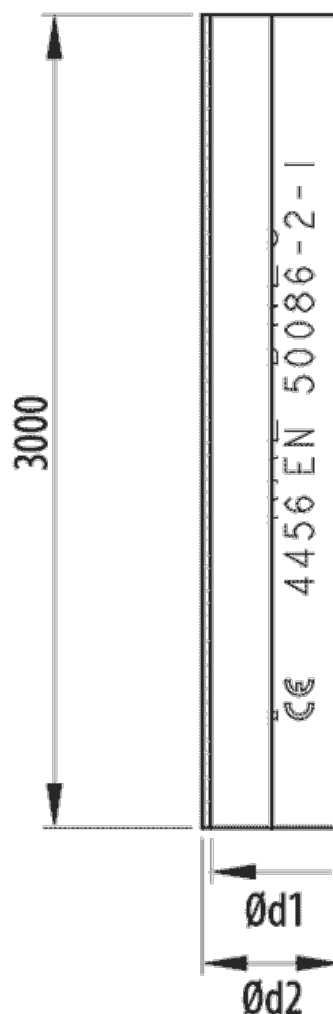


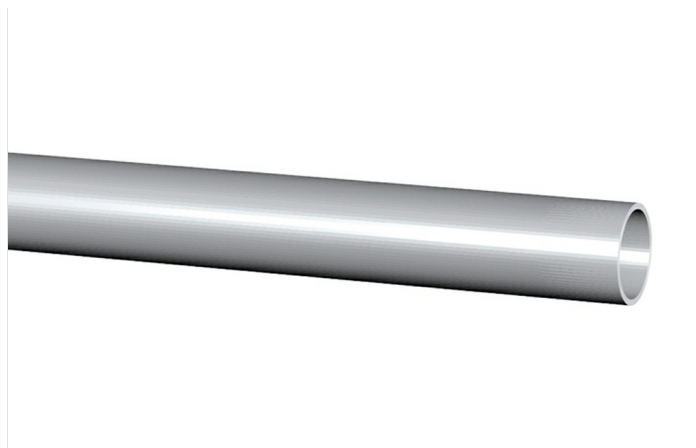

Description

Rigid push fit aluminium conduit for installations that require an excellent degree of resistance to corrosion and high mechanical performance. Lightweight and easy Installation. Optimal rigid conduit for surface installations in industrial plants. It is supplied in 3 metre lengths.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of aluminum, suitable for installations in industrial plants and aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Lightweight and easy to install.

Compression resistance: 1250 N. Impact Resistance: Grade 4.

Push fit type connection for joining conduits or accessories.

Applications

Its use is recommended in installations that require high mechanical performance and a high resistance to corrosion in tertiary and industrial applications with high safety requirements and premises with risk of fire or explosion. Also for outdoor installation and aggressive environments.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



PHARMACEUTICAL INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001173	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		AL	
Finish		ALU, Aluminium	
DN		NW32	
Ø d1 (mm)		29.6	
Ø d2 (mm)		32	
kg/u		0,271	
u		30	
Material		Aluminum	
Cod. IEC.61386		4456	
Compression strength (N)		1250 N	
Impact Strength (J)		6 J	
IP		IP44	
Working temperature range (°C)		-45 / 250 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic