
# RAL Stand off Clamp ( Ref: 55031020 )



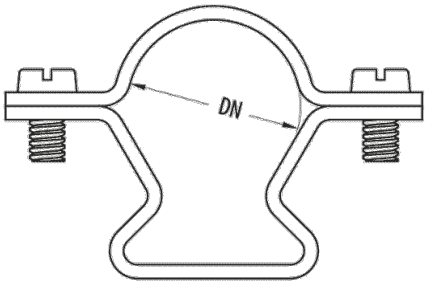


## Description

Aluminum stand off clamp for fixing rigid metal conduits. Fixing with screws. Available in several diameters.

## Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has a foot that allows the conduit to stand off from the floor or wall.

Available in various sizes: NW16, NW20, NW25, NW32 and NW40.

Made of aluminum, suitable for installations in industrial plants and aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Working temperature: -45°C to + 250°C.

## Applications

It is recommended for RAL aluminium conduits in installations that require high mechanical performance. With a high resistance to corrosion in applications of industrial plants, tertiary and industrial sector with high safety requirements. Premises with risk of fire or explosion. Installation outside and in aggressive environments.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# RAL Stand off Clamp ( Ref: 55031020 )

## Product data

| | |
|---|---|
| **ETIM 10** | EC000127 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | |
| **Protection System** | AL |
| **Finish** | ALU, Aluminium |
| **DN** | NW20 |
| **kg/u** | 0,003 |

| | |
|---|---|
| **u** | 50 |
| **Material** | Aluminum |
| **Working temperature range (°C)** | -45 / 250 °C |
| **Fire resistance** | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."