


## Grip Clamp

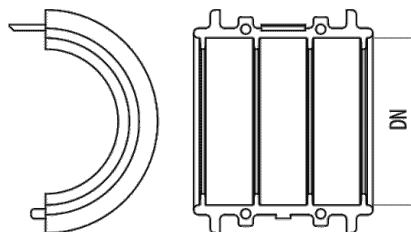

### Description

Fixing clamp for polyamide 12 self-extinguishing conduits, halogen-free, black RAL9005 available in several sizes. It is used together with medium and final support and protectors for the attachment of RB-PA and RB-PU conduits in Robotics applications.

### Advantages

Manufactured in polyamide 12. Self-extinguishing, halogen-free and flame-retardant.

Fixing the tube together with other accessories in robot joints.

Working temperature: -25°C to + 90°C.

Safe opening and closing to ensure proper fastening of the tubes.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

### Applications

Suitable for Robotics and wiring installations for robot arms in assembly lines, industrial applications, etc.

### Solutions



Main technical characteristics

Colour	Black RAL 9005	DN	NW52, NW70		10		Poyamide 12		-25 / 90 °C	
							ETIM EC000464			
	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA									

Product data

DN	Ref	kg/u
NW52	33120052	0.076
NW70	33120070	0.177

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic