
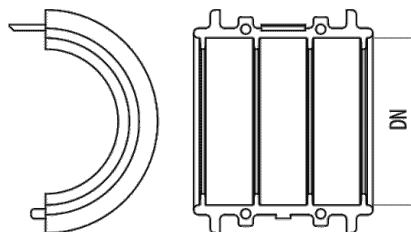


Medium Support

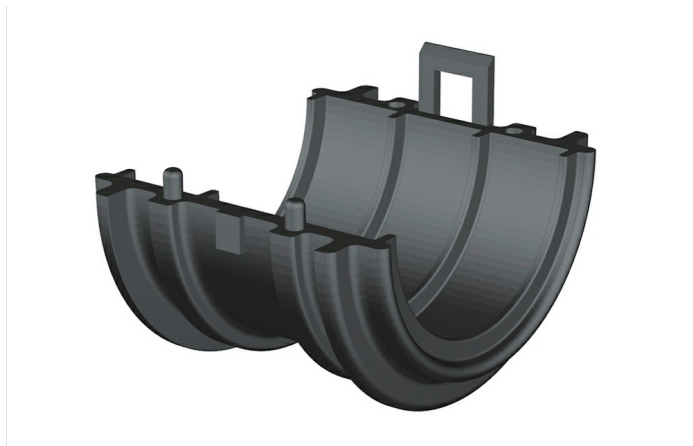

Description

Medium conduit support of self-extinguishing polyamide 12, free of halogens and available in various sizes. It is used in conjunction with clamps and has tabs for the correct fastening of RB-PA and RB-PU conduits in Robotics applications.

Advantages

Manufactured in polyamide 12. Self-extinguishing, halogen-free and flame-retardant.

Fixing the tube together with clamps in robot joints.

Working temperature: -25°C to + 90°C.

It has tabs for the correct attachment of RB-PA and RB-PU flexible conduits.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for Robotics and wiring installations for robot arms in assembly lines, industrial applications, etc.

Solutions



Main technical characteristics

Colour	Black RAL 9005	DN	NW36, NW48, NW52, NW70		10		M	Poyamide 12		🔥	-25 / 90 °C
	🚫 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM	EC000127						

Product data

DN	Ref	kg/u
NW36	33110036	0.044
NW48	33110048	0.036
NW52	33110052	0.028
NW70	33110070	0.028

🔩 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

🔩 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

