
RINOX Rigid Conduit



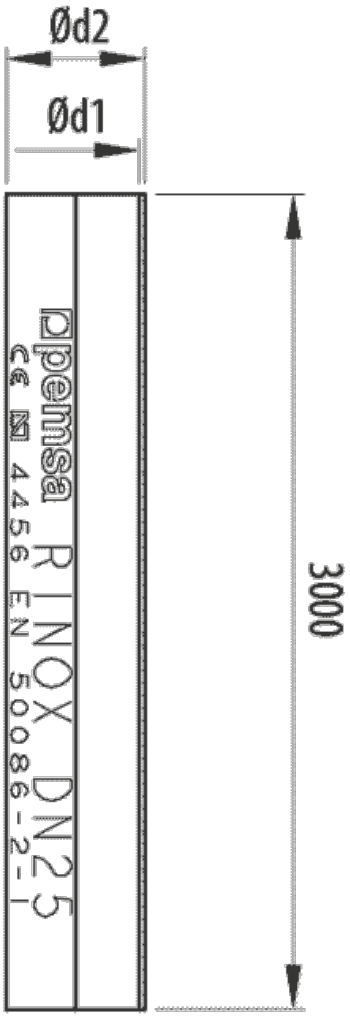

Description

Rigid push fit conduit in AISI 304 stainless steel, recommended in installations that require an excellent degree of resistance to corrosion and high mechanical performance, for the conduction and connection of wiring, especially in food and industrial industries. It is supplied in 3 metre lengths. Available in various diameters.

Advantages

Push fit type connection for joining conduits or accessories.

Suitable for aesthetic applications.

Compression resistance: 1250 N. Impact Resistance: Grade 4.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in stainless steel AISI 303, 304, (standard EN 10088), with Thermicron passivation treatment, suitable for installations in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Its use is recommended in installations that require an excellent degree of resistance to corrosion and high mechanical performance. For cable management in industrial plants, especially food, beverage and agricultural industries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RINOX Rigid Conduit

FOOD INDUSTRY PHARMACEUTICAL INDUSTRY

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RINOX Rigid Conduit

Main technical characteristics

INOX | DN NW16, NW20, NW25, NW32, NW40, NW50 | Stainless steel AISI 304 | Cod IEC 61386 4456 | 1250 N | 6 J | IP44

-45 / 250 °C | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC001173

Product data

DN	Od1	Od2	REF	kg/u	TU
NW16	14	16	13021016	0,351	15
NW20	18	20	13021020	0,441	15
NW25	23	25	13021025	0,671	15
NW32	29.6	32	13021032	0,882	15
NW40	37.6	40	13021040	1,102	9
NW50	47.6	50	13021050	1,443	9

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."