


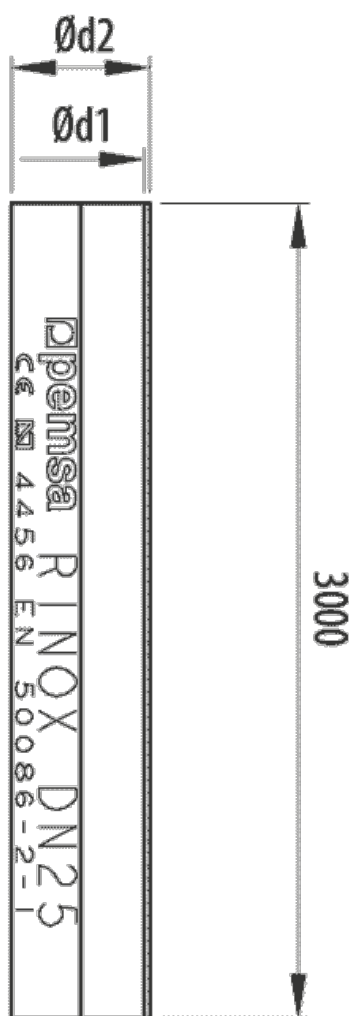

Description

Rigid push fit conduit in AISI 304 stainless steel, recommended in installations that require an excellent degree of resistance to corrosion and high mechanical performance, for the conduction and connection of wiring, especially in food and industrial industries. It is supplied in 3 metre lengths. Available in various diameters.

Advantages

Suitable for aesthetic applications.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Manufactured in stainless steel AISI 303, 304, (standard EN 10088), with Thermicron passivation treatment, suitable for installations in aggressive environments. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Compression resistance: 1250 N. Impact Resistance: Grade 4.

Push fit type connection for joining conduits or accessories.

Applications

Its use is recommended in installations that require an excellent degree of resistance to corrosion and high mechanical performance. For cable management in industrial plants, especially food, beverage and agricultural industries.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



FOOD INDUSTRY PHARMACEUTICAL INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001173	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		INOX	
Finish		Stainless Steel AISI 304	
DN		NW16	
Ø d1 (mm)		14	
Ø d2 (mm)		16	
kg/u		0,351	
u		15	
Material		Stainless steel AISI 304	
Cod. IEC.61386		4456	
Compression strength (N)		1250 N	
Impact Strength (J)		6 J	
IP		IP44	
Working temperature range (°C)		-45 / 250 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

- Protection System
- CU

PG

EZ

BC

BK8

GC

INOX

PT

AL

LN
- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

- Insulating materials
- PC+ABS

PVC

PP

PA6

PA12

PU

PE

NBR

PET

TPV
- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic