

RL Rigid Conduit

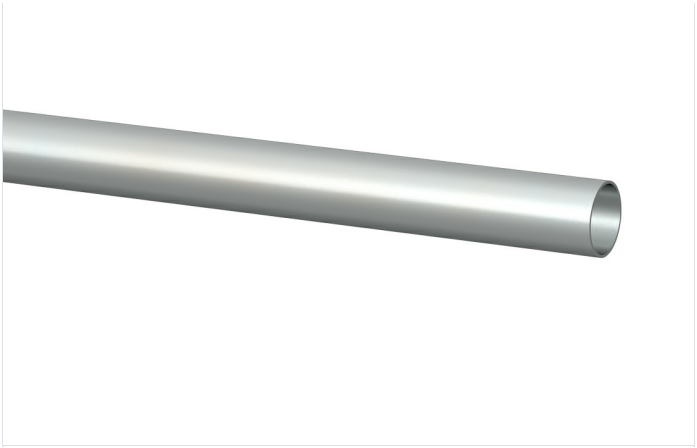

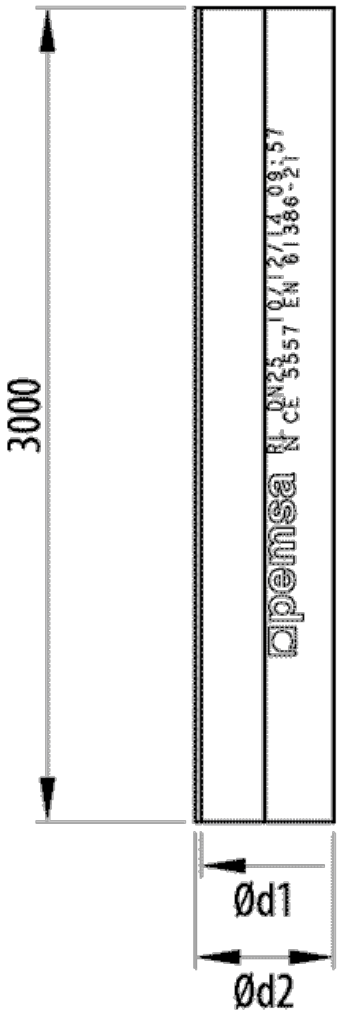

Description

Rigid push fit steel conduit with EZ Protection System and anticorrosive interior primer. Especially suitable for installations that require high mechanical performance and medium resistance to corrosion. IP54 protection index. Available in different diameters and supplied in 3 metre lengths. N mark of Aenor according to IEC 61386 standard.

Advantages

Push fit type connection for joining conduits or accessories.

High mechanical performance.

Compression resistance: 4000 N. Impact Resistance: Grade 5.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Anti-corrosive interior primer. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Applications

Its use is recommended in installations requiring high mechanical performance and medium resistance to corrosion in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

RL Rigid Conduit

Main technical characteristics

EZ | DN NW16, NW20, NW25, NW32, NW40, NW50, NW63 | Steel with surface coating | 5557 | 4000 N | 20 J | IP54 | -45 / 400 °C | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA | ETIM 10 EC001173

Product data

DN	Ød1	Ød2	REF	kg/u	u
NW16	14	16	13040016	0,379	51
NW20	18	20	13040020	0,479	51
NW25	23	25	13040025	0,606	30
NW32	29.6	32	13040032	0,930	21
NW40	37.6	40	13040040	1,177	15
NW50	47.6	50	13040050	1,708	15
NW63	60.6	63	13040063	2,314	9

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."