
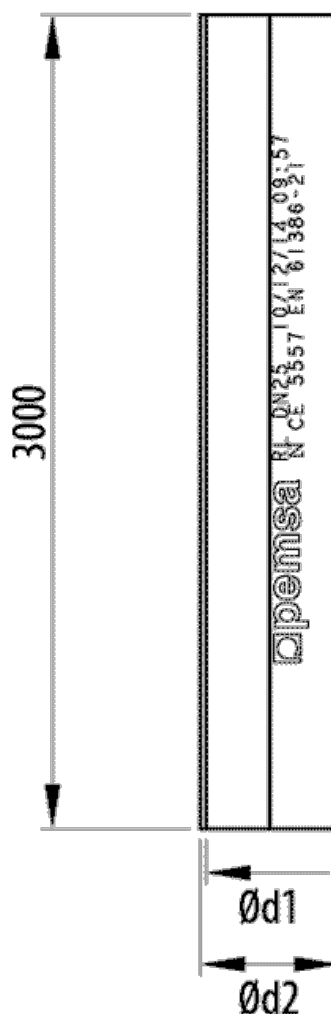


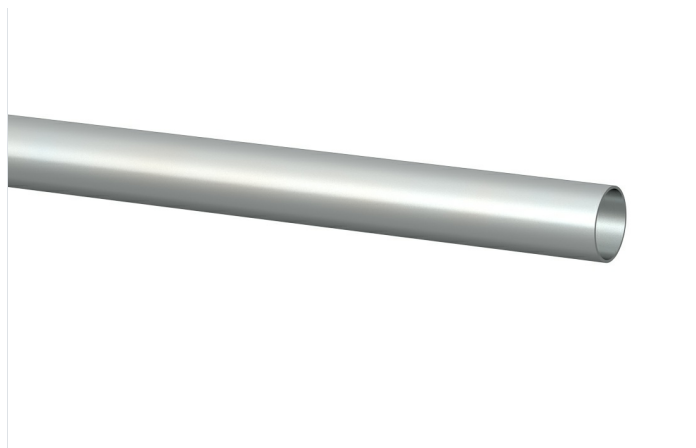

Description

Rigid push fit steel conduit with EZ Protection System and anticorrosive interior primer. Especially suitable for installations that require high mechanical performance and medium resistance to corrosion. IP54 protection index. Available in different diameters and supplied in 3 metre lengths. N mark of Aenor according to IEC 61386 standard.

Advantages

High mechanical performance.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Anti-corrosive interior primer. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Compression resistance: 4000 N. Impact Resistance: Grade 5.

Push fit type connection for joining conduits or accessories.

Applications

Its use is recommended in installations requiring high mechanical performance and medium resistance to corrosion in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC001173	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Cod. IEC.61386	
Protection System		5557	
Finish		Compression strength (N)	
DN		4000 N	
Ø d1 (mm)		Impact Strength (J)	
Ø d2 (mm)		20 J	
kg/u		IP	
u		IP54	
		Working temperature range (°C)	
		-45 / 400 °C	
		Fire resistance	
		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic