
L Elbow (Ref: 55071040)



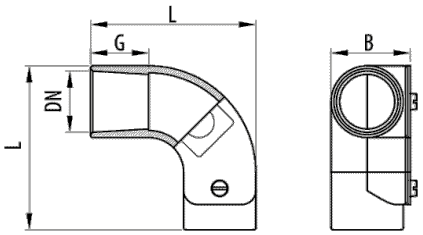

Description

Push fit elbow with removable aluminum lid for the connection of RL conduits in installations requiring high mechanical performance and medium resistance to corrosion. With an IP54 protection index. The accessory creates a 90° bend in the installation. Available in different diameters.

Advantages

Compatible with rigid RAL aluminum conduits, for installations requiring high resistance to corrosion.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of cast aluminum. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Protection index EN 60529: IP54.

Push fit connection system. It facilitates the creation of 90° bends in the conduit.

Applications

Suitable for the connection of rigid RL and RAL metal conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

L Elbow (Ref: 55071040)

Product data

ETIM 10	EC000936	**kg/u**	0,239
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	4
Protection System	AL	**Material**	Aluminum
Finish	ALU, Aluminium	**IP**	IP54
DN	NW40	**Working temperature range (°C)**	-45 / 400 ºC
G (mm)	33.5	**Fire resistance**	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	91		
B (mm)	51.5		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."