


90° RL Bend (Ref: 55015025)

1/2

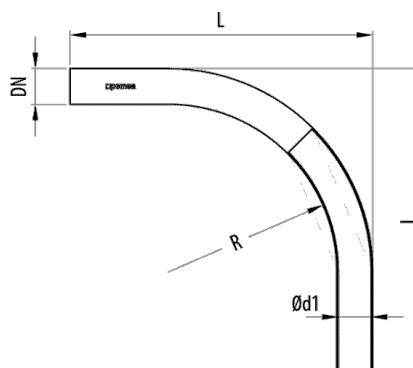

Description

90° push fit bend in EZ Protection System steel for the connection of RL conduits in installations requiring high mechanical performance and medium resistance to corrosion. With an IP54 protection index. N mark of Aenor according to IEC 61386 standard. Available in different diameters.

Advantages

Push-in type connection with RL sleeves for connection to RL conduits.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Protection index EN 60529: IP54.

Working temperature: -45°C to + 400°C.

Applications

Suitable for the creation of 90° angles in RL plug-in rigid metal conduit installations in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC000936	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Steel with surface coating
Protection System	EZ	Compression strength (N)	4000 N
Finish	EZ2, Electrogalvanised	Impact Strength (J)	20 J
DN	NW25	IP	IP54
Ø d1 (mm)	23	Working temperature range (°C)	-45 / 400 °C
R (mm)	117	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	198		
kg/u	0,215		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

