


90° RL Bend (Ref: 55015050)

1/2

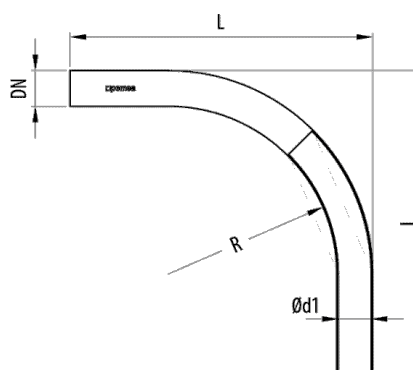

Description

90° push fit bend in EZ Protection System steel for the connection of RL conduits in installations requiring high mechanical performance and medium resistance to corrosion. With an IP54 protection index. N mark of Aenor according to IEC 61386 standard. Available in different diameters.

Advantages

Push-in type connection with RL sleeves for connection to RL conduits.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Protection index EN 60529: IP54.

Working temperature: -45°C to + 400°C.

Applications

Suitable for the creation of 90° angles in RL plug-in rigid metal conduit installations in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



ETIM 10	EC000936	u	5
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Steel with surface coating
Protection System	EZ	Compression strength (N)	4000 N
Finish	EZ2, Electrogalvanised	Impact Strength (J)	20 J
DN	NW50	IP	IP54
Ø d1 (mm)	47.6	Working temperature range (°C)	-45 / 400 °C
R (mm)	160	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
L (mm)	351		
kg/u	1,021		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Reijtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."