


TL Tee

1/2

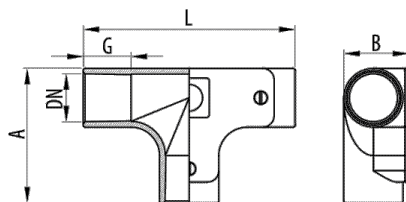

Description

Push fit Tee with removable cover for the connection of RL conduits in installations requiring high mechanical performance and medium resistance to corrosion. With an IP54 protection index. Accessory to create a branch in the conduit run. Made of aluminium and available in different diameters.

Advantages

Push fit connection system. Accessory to create branches in the routing of cable conduits.

Protection index EN 60529: IP54.

Compatible with rigid RAL aluminum conduits, for installations requiring high resistance to corrosion.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of cast aluminum. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for the connection of rigid RL and RAL metal conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 AL

 NW16, NW20, NW25, NW32, NW40, NW50

 Aluminum

 IP54

 -45 / 400 °C

 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10
EC002922

Product data							
DN		L _(mm)	A _(mm)	B _(mm)	Ref	kg/u	
NW16	20	96	61	30.5	55081016	0,129	10
NW20	21.5	96	61	30.5	55081020	0,112	10
NW25	26.5	111	71	35.5	55081025	0,150	8
NW32	32	146	96	51.5	55081032	0,448	2
NW40	33.5	146	96	51.5	55081040	0,345	2
NW50	43.5	183	120	61.5	55081050	0,567	1

 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic