


RR Rigid Conduit

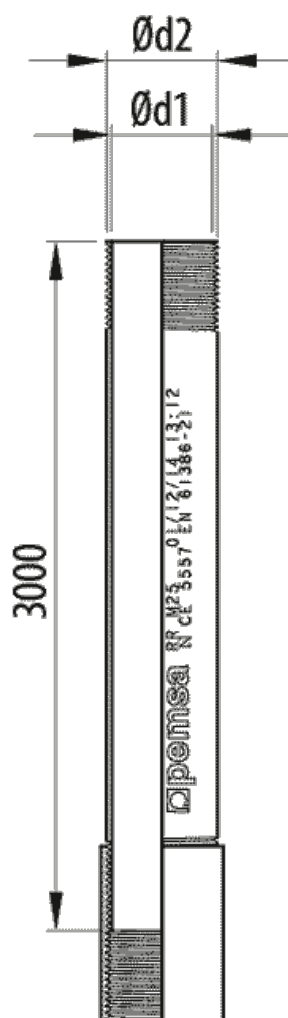

Description

Rigid EZ Protection System steel tube with anticorrosive interior primer. Especially suitable for installations that require high mechanical performance and medium resistance to corrosion. IP54 protection index. Available in different diameters and supplied in 3 metre lengths. N mark of Aenor according to IEC 61386 standard.

Advantages

Threaded connection for joining conduits or accessories. Supplied complete with coupler.

High mechanical performance.

Compression resistance: 4000 N. Impact Resistance: Grade 5.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Anti-corrosive interior primer. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Applications

Its use is recommended in installations requiring high mechanical performance and medium resistance to corrosion in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 EZ	 DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	 M16, M20, M25, M32, M40, M50, M63	 Steel with surface coating	ETIM 10			
 5557	 4000 N	 20 J	 IP54	 -45 / 400 °C	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	EC001173	

Product data

DN					Ref	kg/u	
NW16	M16	15	13.6	16	13030016	0,447	51
NW20	M20	15	17.6	20	13030020	0,566	51
NW25	M25	20	22.6	25	13030025	0,718	30
NW32	M32	20	29.6	32	13030032	1,075	21
NW40	M40	20	37	40	13030040	1,357	15
NW50	M50	20	47	50	13030050	1,708	15
NW63	M63	20	60	63	13030063	2,614	9

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic