


R Elbow

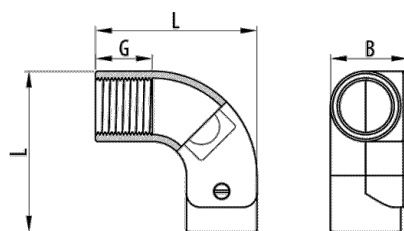

Description

Threaded elbow with removable lid in aluminium for the connection of RR conduits in installations that require high mechanical performance and an average resistance to corrosion. With an IP54 protection index. The accessory creates a 90° bend in the installation. Available in different diameters.

Advantages

Threaded connection system. It facilitates the creation of 90° bends in the conduit.

Protection index EN 60529: IP54.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of cast aluminum. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for the connection of RR metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



Main technical characteristics

 AL	 NW16, NW20, NW25, NW32, NW40, NW50	 M16, M20, M25, M32, M40, M50	 Aluminum	 IP54
 -45 / 400 °C	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000936		

Product data

DN			L _(mm)	B _(mm)	REF	kg/u	
NW16	M16	20	61	30.5	55070016	0,085	20
NW20	M20	21.5	61	30.5	55070020	0,073	20
NW25	M25	26.5	71	35.5	55070025	0,101	12
NW32	M32	32	91	51.5	55070032	0,289	4
NW40	M40	33.5	91	51.5	55070040	0,221	4
NW50	M50	43.5	119	61.5	55070050	0,367	2

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic