


RR Coupler

1/2

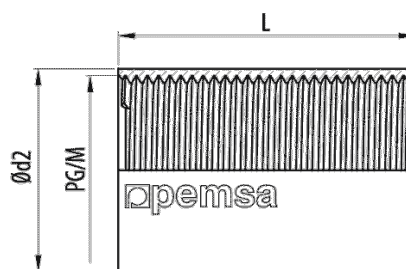

Description

EZ Protection System steel threaded coupler for the connection of RR conduits in installations that require high mechanical performance and an average resistance to corrosion. IP54 protection index. N mark of Aenor according to IEC 61386 standard.

Advantages

Threaded connection for joining RR conduits or accessories.

Protection index EN 60529: IP54.

Working temperature: -45°C to + 400°C.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

Applications

Suitable for joining RR threaded metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsal®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsal®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsal, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsal Cable Management, S.A."



Main technical characteristics

 EZ	 DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	 M16, M20, M25, M32, M40, M50, M63	 Steel with surface coating
 IP65	 -45 / 400 °C	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM 10 EC000939

Product data

DN			L _{mm}	Ref	kg/u	
NW16	M16	18.5	30	55004016	0,024	50
NW20	M20	22.5	35	55004020	0,035	50
NW25	M25	27.5	40	55004025	0,050	50
NW32	M32	34.5	43	55004032	0,069	25
NW40	M40	42.5	43	55004040	0,086	20
NW50	M50	52.5	52	55004050	0,131	10
NW63	M63	65.5	63	55004063	0,199	6

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

