



End Cap

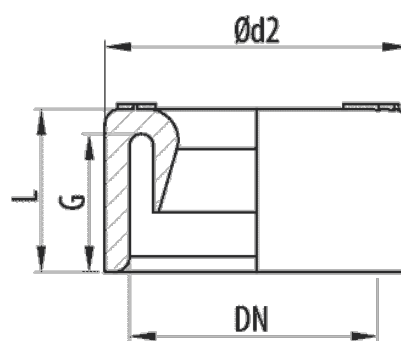

Description

Plastic terminal for the protection of the cable exit in the ends of RR and RL rigid conduits. Made of translucent polyethylene for the protection of the exit of the cable in the end of the corrugated conduit. Available in several sizes.

Advantages

It protects the exit of cables from friction or superficial damages.

Available in various sizes.

Perfect adjustment on the end of the conduit.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for the protection of the ends of RL, RR, RLGC, RRG, RAL, RINOX metal rigid conduit in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions



Main technical characteristics

Colour	Grey RAL 7035	DN	NW16, NW20, NW25, NW32, NW40, NW50, NW63	 PVC	 -5 / 60 °C	 Flame retardant	ETIM 10 EC000937
--------	---------------	----	--	---	--	---	------------------

Product data

DN	Ref	kg/u	
NW16	55111016	0,001	100
NW20	55111020	0,002	100
NW25	55111025	0,005	100
NW32	55111032	0,007	50
NW40	55111040	0,011	
NW50	55111050	0,018	25
NW63	55111063	0,025	20

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic