



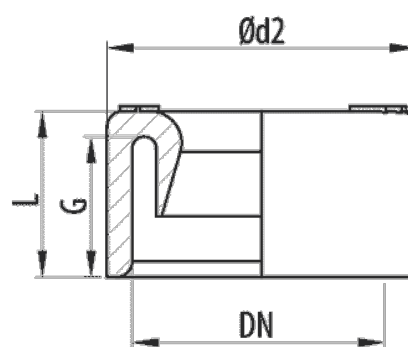

Description

Plastic terminal for the protection of the cable exit in the ends of RR and RL rigid conduits. Made of translucent polyethylene for the protection of the exit of the cable in the end of the corrugated conduit. Available in several sizes.

Advantages

Perfect adjustment on the end of the conduit.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in various sizes.

It protects the exit of cables from friction or superficial damages.

Applications

Suitable for the protection of the ends of RL, RR, RLGC, RRG, RAL, RINOX metal rigid conduit in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions



Product data			
ETIM 10		EC000937	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Colour		Grey RAL 7035	
DN		NW25	
kg/u		0,005	
u		100	
Material		PVC	
Working temperature range (°C)		-5 / 60 °C	
Fire resistance		Flame retardant	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic