



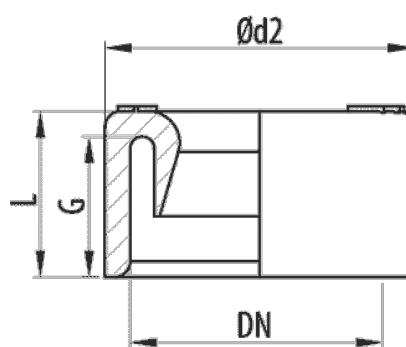

Description

Plastic terminal for the protection of the cable exit in the ends of RR and RL rigid conduits. Made of translucent polyethylene for the protection of the exit of the cable in the end of the corrugated conduit. Available in several sizes.

Advantages

Perfect adjustment on the end of the conduit.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in various sizes.

It protects the exit of cables from friction or superficial damages.

Applications

Suitable for the protection of the ends of RL, RR, RLGC, RRG, RAL, RINOX metal rigid conduit in building, tertiary and industrial applications with high safety requirements. Premises of public attendance or with risk of fire or explosion.

Solutions



Product data			
ETIM 10		EC000937	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Colour		Grey RAL 7035	
DN		NW50	
kg/u		0,018	
u		25	
Material		PVC	
Working temperature range (°C)		-5 / 60 °C	
Fire resistance		Flame retardant	

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

