


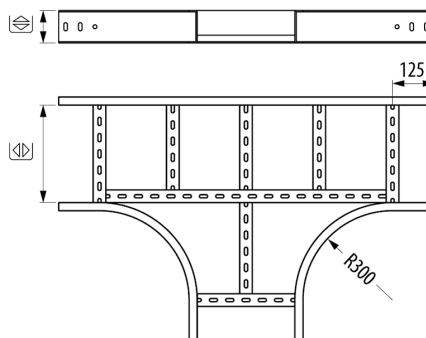

Description

Metal accessory with welded safety edge, for creating a Tee at any point in the Megaband® REP ladder. Of 120 mm height, Width 600 mm. Assembly using bolts. Bend radius 300mm. Check availability of 600mm radius. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Allows cable installation to be branched from one to two separate wiring lines.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating tees with Megaband® REP ladder for the distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations and the service sector when supporting very high loads.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001540	kg/u	24,400
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	63,196	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	120	Fire resistance	A1 No combustible
Width (mm)	600		
R (mm)	300		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

