

# Nemaband Tee ( Ref: 82002850 )

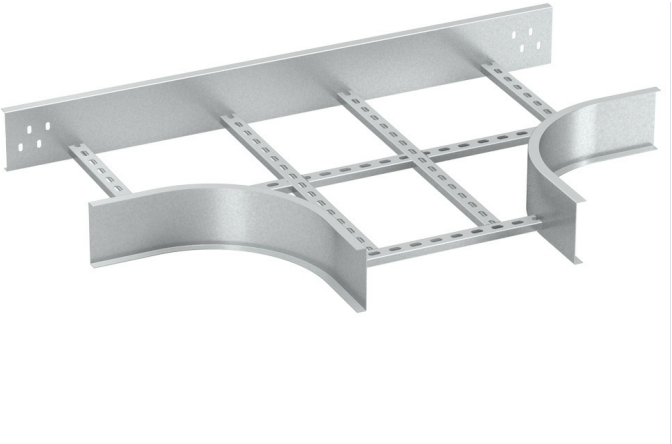

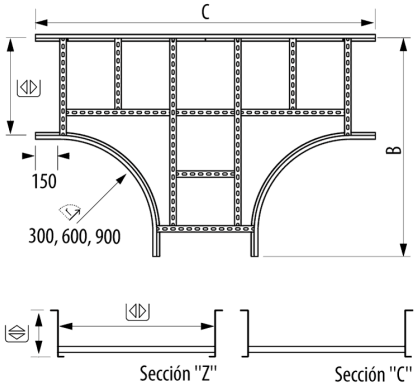


## Description

Metal accessory for creating a Tee at any point in the Nemaband® ladder. Of 100 mm height, Width 900 mm. Allows the creation of a Tee in the cable path. Check availability of 900mm radius. Made from steel with GC Protection system.

## Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Cable tray connection using M8 screws or Nemaband® M8 joint kit

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Allows cable installation to be branched from one to three separate wiring lines.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

## Applications

Suitable for the creation of tee's with Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Nemaband Tee ( Ref: 82002850 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001540 | **kg/u** | 18,900 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 48,951 | **u** | 1 |
| **Protection System** | GC | **Material** | Steel with surface coating |
| **Finish** | HDG, Hot Dip Galvanised | **Impact Strength (J)** | 20 J |
| **Resistance Class** | Class 8 | **Working temperature range (°C)** | -50 / 150 °C |
| **Flange (mm)** | 100 | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 900 | | |
| **R (mm)** | 300 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."