
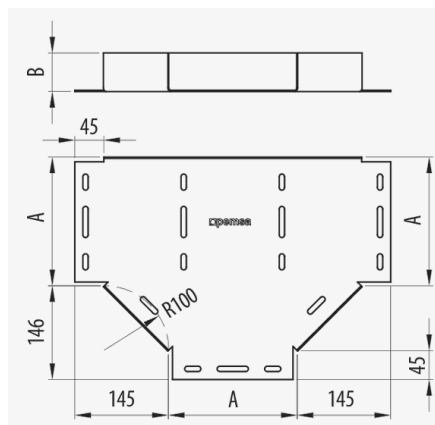


PQ Tee

1/3

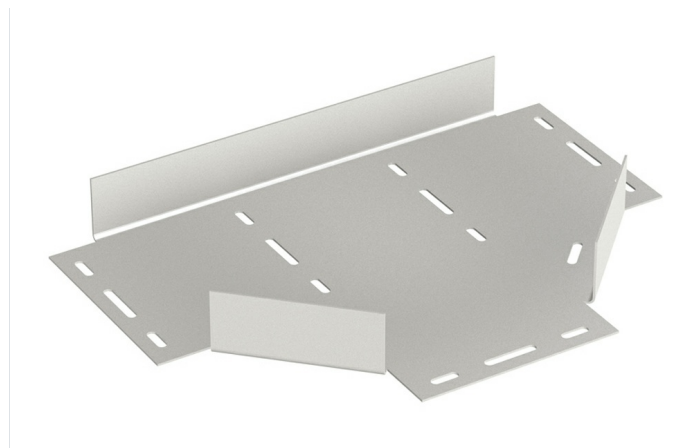

Description

Metal accessory for the construction of a Tee at any point of the Pemsaband® PQU and PQW tray. The Pemsaband® PQ Tee is used to create a T-shaped section allowing the cable path to go in two separate lines. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of Tees in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 GC	 Class 8	 15, 30, 50, 60	 100, 150, 200, 300, 400, 500, 600	 100	 1	 Steel with surface coating
 20 J	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001544			

Product data

		Ref	kg/u
15	100	70223010	1,120
15	150	70223015	1,690
15	200	70223020	2,340
15	300	70223030	3,910
30	100	70223110	1,270
30	150	70223115	1,850
30	200	70223120	2,520
30	300	70223130	4,110
30	400	70223140	5,970
30	500	70223150	8,280
30	600	70223160	10,800
50	100	70223210	1,460
50	150	70223215	2,060
50	200	70223220	2,750
50	300	70223230	4,370
50	400	70223240	6,270
50	500	70223250	8,610
50	600	70223260	11,200
60	100	70223310	1,560
60	150	70223315	2,170
60	200	70223320	2,860
60	300	70223330	4,510
60	400	70223340	6,420
60	500	70223350	8,780
60	600	70223360	11,400

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint

PQ Tee

- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

