
# PQU AL Tee

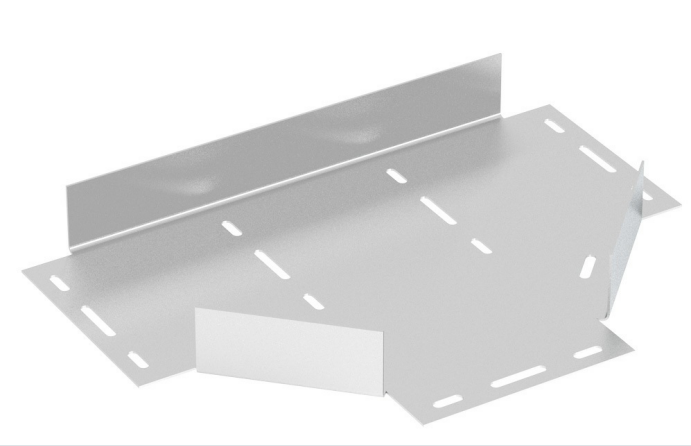

## Description

Metal Tee piece for Pemsaband® PQU AL trays. It facilitates the creation of a Tee at any point, even if they are different widths. Assembly using bolts. Made from Aluminium alloy 1050H24.

## Advantages

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Mounting and fastening by using screws.

CEPSA product approval. Designed according to ESP-2208-5 specification.

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

## Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# PQU AL Tee

## Main technical characteristics

AL | 30, 60 | 100, 200, 300, 400, 600 | 200 | 1 | Aluminum | 20 J | -50 / 150 °C

A1 No combustible | ETIM 10 EC001544

## Product data

| | | REF | kg/u |
|---|---|---|---|
| 30 | 100 | 82002271 | 1,000 |
| 30 | 200 | 82002272 | 1,710 |
| 30 | 300 | 82002273 | 2,550 |
| 30 | 400 | 82002274 | 3,520 |
| 30 | 600 | 82002275 | 5,890 |
| 60 | 100 | 82002276 | 1,220 |
| 60 | 200 | 82002277 | 1,950 |
| 60 | 300 | 82002278 | 2,810 |
| 60 | 400 | 82002279 | 3,800 |
| 60 | 600 | 82002280 | 6,200 |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."