


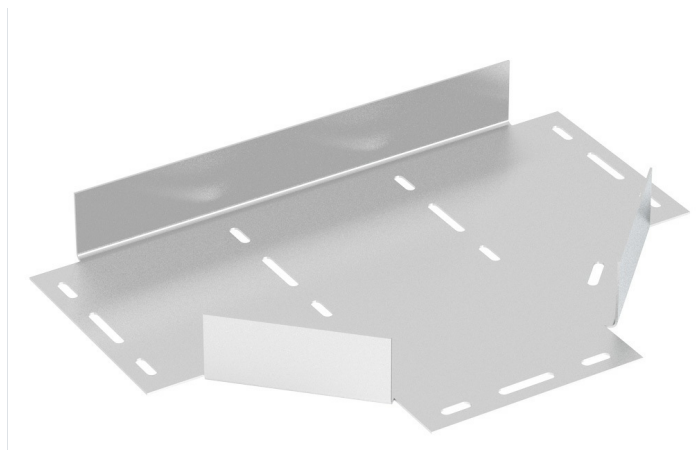

Description

Metal Tee piece for Pemsaband® PQU AL trays. Of 60 mm height, Width 400 mm, With AL protection system. It facilitates the creation of a Tee at any point, even if they are different widths. Assembly using bolts. Made from Aluminium alloy 1050H24.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Mounting and fastening by using screws.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Product data

ETIM 10	EC001544	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Aluminum
Protection System	AL	Impact Strength (J)	20 J
Finish	1050H24 Aluminium	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	60	Fire resistance	A1 No combustible
Width (mm)	400		
R (mm)	200		
kg/u	3,800		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

