


Tee Pemsaband Vulcan

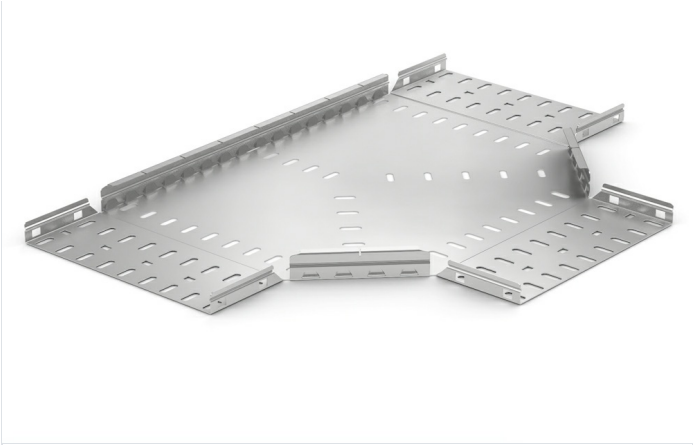

Description

Advantages

Applications

Solutions



Main technical characteristics

PG3, Pregalvanised, ZM High Resistance Alloy	12, 18, 25, 50	50, 75, 100, 150, 225, 300, 450, 600, 750, 900	1
Steel with surface coating	20 J	IP44	-50 / 150 °C
		A1 No combustible	ETIM 10

Product data

§	Ⓕ	Class	Ⓜ	Ⓜ	Ref	kg/u
PG	PG3, Pregalvanised	Class 3	12	50	82004800	0,266
PG	PG3, Pregalvanised	Class 3	12	75	82004801	0,366
PG	PG3, Pregalvanised	Class 3	12	100	82004802	0,470
PG	PG3, Pregalvanised	Class 3	12	150	82004803	0,699
PG	PG3, Pregalvanised	Class 3	12	225	82004804	1,109
PG	PG3, Pregalvanised	Class 3	18	300	82004805	2,461
PG	PG3, Pregalvanised	Class 3	25	50	82004806	0,354
PG	PG3, Pregalvanised	Class 3	25	75	82004807	0,457
PG	PG3, Pregalvanised	Class 3	25	100	82004808	0,565
PG	PG3, Pregalvanised	Class 3	25	150	82004809	0,801
PG	PG3, Pregalvanised	Class 3	25	225	82004810	1,220
PG	PG3, Pregalvanised	Class 3	25	300	82004811	2,563
PG	PG3, Pregalvanised	Class 3	25	450	82004812	4,345
PG	PG3, Pregalvanised	Class 3	25	600	82004813	6,558
PG	PG3, Pregalvanised	Class 3	50	50	82004814	0,489
PG	PG3, Pregalvanised	Class 3	50	75	82004815	0,596
PG	PG3, Pregalvanised	Class 3	50	100	82004816	0,707
PG	PG3, Pregalvanised	Class 3	50	150	82004817	0,951
PG	PG3, Pregalvanised	Class 3	50	225	82004818	2,038
PG	PG3, Pregalvanised	Class 3	50	300	82004819	2,828
PG	PG3, Pregalvanised	Class 3	50	450	82004820	4,645
PG	PG3, Pregalvanised	Class 3	50	600	82004821	6,893
PG	PG3, Pregalvanised	Class 3	50	750	82004822	15,648
PG	PG3, Pregalvanised	Class 3	50	900	82004823	20,771
PG	PG3, Pregalvanised	Class 3	25	750	82004824	15,057
PG	PG3, Pregalvanised	Class 3	25	900	82004825	20,122
AZ+	ZM High Resistance Alloy	Class 8	25	750	82004826	15,057
AZ+	ZM High Resistance Alloy	Class 8	25	900	82004827	20,122
AZ+	ZM High Resistance Alloy	Class 8	25	50	82004828	0,354
AZ+	ZM High Resistance Alloy	Class 8	25	75	82004829	0,457
AZ+	ZM High Resistance Alloy	Class 8	25	100	82004830	0,565
AZ+	ZM High Resistance Alloy	Class 8	25	150	82004831	0,801
AZ+	ZM High Resistance Alloy	Class 8	25	225	82004832	1,220
AZ+	ZM High Resistance Alloy	Class 8	25	300	82004833	2,564
AZ+	ZM High Resistance Alloy	Class 8	25	450	82004834	4,345



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Ⓢ	Ⓕ	EN 61537			Ref	kg/u
AZ+	ZM High Resistance Alloy	Class 8	25	600	82004835	6,558
AZ+	ZM High Resistance Alloy	Class 8	50	50	82004836	0,489
AZ+	ZM High Resistance Alloy	Class 8	50	75	82004837	0,596
AZ+	ZM High Resistance Alloy	Class 8	50	100	82004838	0,707
AZ+	ZM High Resistance Alloy	Class 8	50	150	82004839	0,951
AZ+	ZM High Resistance Alloy	Class 8	50	225	82004840	2,038
AZ+	ZM High Resistance Alloy	Class 8	50	300	82004841	2,828
AZ+	ZM High Resistance Alloy	Class 8	50	450	82004842	4,645
AZ+	ZM High Resistance Alloy	Class 8	50	600	82004843	6,893
AZ+	ZM High Resistance Alloy	Class 8	50	750	82004976	15,648
AZ+	ZM High Resistance Alloy	Class 8	50	900	82004977	20,771

Ⓢ Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic