


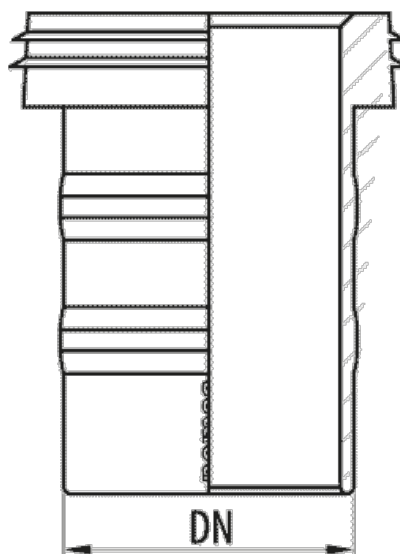

Description

Translucent polyethylene terminal, NW12 for the protection of the cable exit at the end of the corrugated conduits of Pemsaflex, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU.

Advantages

Applications

Solutions



Product data

ETIM 10	EC000519	Material	Polyethylene
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Working temperature range (°C)	-25 / 60 °C
Colour	Transparent	Fire resistance	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA
DN	NW12		
kg/u	0,001		
u	50		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

