
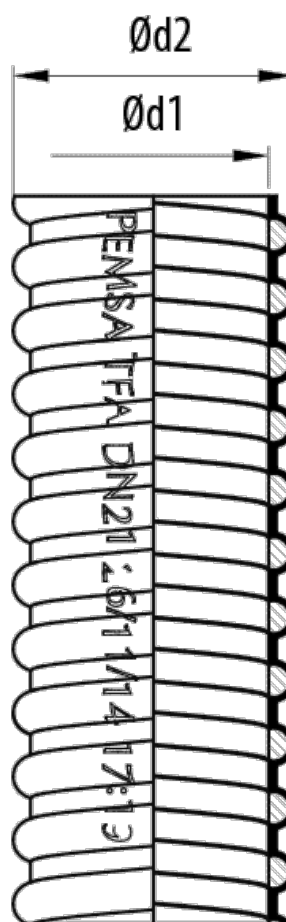


TFA Flexible Conduit

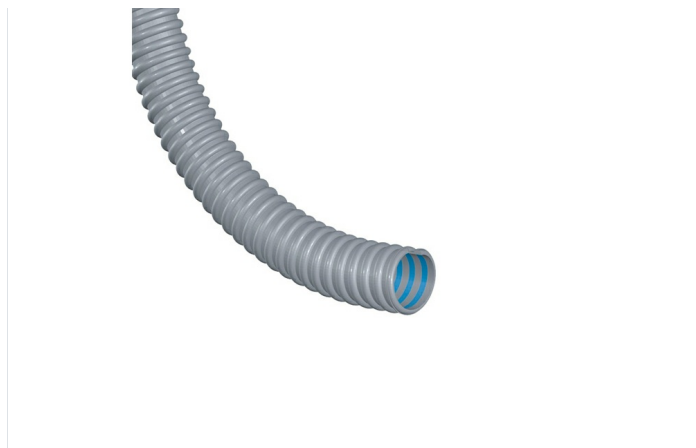

Description

Spiral flexible conduit, made of PVC with internal spiral of rigid PVC. It is insulating, waterproof and self-extinguishing, recommended for the protection of electrical conductors in buildings, tertiary sector, machinery and industry. IP65 protection index. The TFA flexible conduit is installed with P and RGP fittings for connection to equipment or boxes. Available in different colours and various diameters.

Advantages

Impact resistance. Grade 4, 6 Joules.

Protection index EN 60529: IP65.

Working temperature: -5°C to + 60°C.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of PVC, self extinguishing, flame retardant.

Applications

Its use is recommended for the protection of wiring and conductors in general applications, building, tertiary sector, machinery and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com



Any information included in this document is property of Pemsaband. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsaband. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsaband, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsaband Cable Management, S.A."

Main technical characteristics

Colour	Grey RAL 7011	DN	NW 7, NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48		 PVC	 2421	 320 N	 6 J
	IP65		-5 / 60 °C		Flame retardant	ETIM 10 EC001177		

Product data

DN				Ref	kg/u	
NW 7	10	13.3	14	10011007	0,056	25
NW 9	11.8	15.7	16	10011009	0,071	25
NW11	14.7	18.7	20	10011011	0,079	25
NW13	16.8	20.7	22	10011013	0,106	25
NW16	18.1	22.8	24	10011016	0,121	25
NW21	23.6	28.9	30	10011021	0,166	25
NW29	30.5	37	38	10011029	0,252	25
NW36	40	47.2	48	10011036	0,382	25
NW48	53.1	60	60	10011048	0,418	20

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic