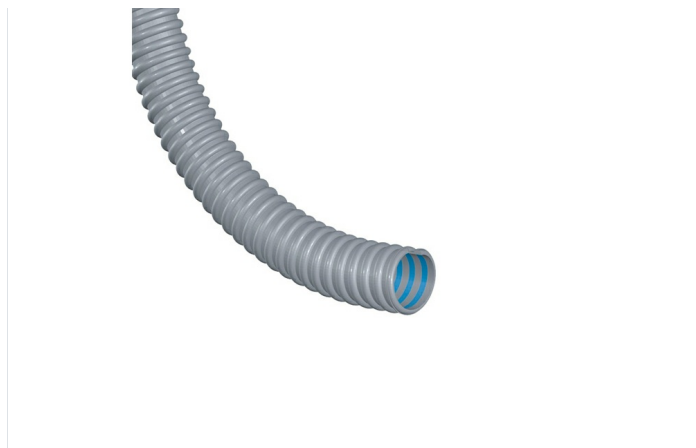


Description

Spiral flexible conduit, made of PVC with internal spiral of rigid PVC. It is insulating, waterproof and self-extinguishing, recommended for the protection of electrical conductors in buildings, tertiary sector, machinery and industry. IP65 protection index. The TFA flexible conduit is installed with P and RGP fittings for connection to equipment or boxes. Available in different colours and various diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of PVC, self extinguishing, flame retardant.

Protection index EN 60529: IP65.

Impact resistance. Grade 4, 6 Joules.

Working temperature: -5°C to + 60°C.

Applications

Its use is recommended for the protection of wiring and conductors in general applications, building, tertiary sector, machinery and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC001177	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Colour		Grey RAL 7011	
DN		NW 9	
Ø d1 (mm)		11.8	
Ø d2 (mm)		15.7	
R (mm)		16	
kg/u		0,071	
u		25	
Material		PVC	
Cod. IEC.61386		2421	
Compression strength (N)		320 N	
Impact Strength (J)		6 J	
IP		IP65	
Working temperature range (°C)		-5 / 60 °C	
Fire resistance		Flame retardant	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic