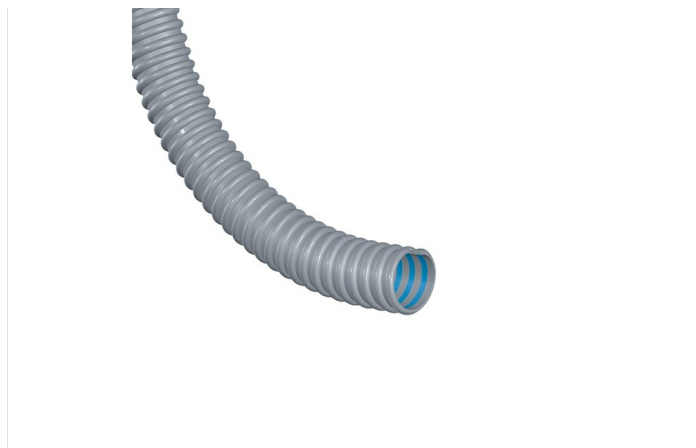


Description

Spiral flexible conduit, made of PVC with internal spiral of rigid PVC. It is insulating, waterproof and self-extinguishing, recommended for the protection of electrical conductors in buildings, tertiary sector, machinery and industry. IP65 protection index. The TFA flexible conduit is installed with P and RGP fittings for connection to equipment or boxes. Available in different colours and various diameters.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of PVC, self extinguishing, flame retardant.

Protection index EN 60529: IP65.

Impact resistance. Grade 4, 6 Joules.

Working temperature: -5°C to + 60°C.

Applications

Its use is recommended for the protection of wiring and conductors in general applications, building, tertiary sector, machinery and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001177	Material	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Cod. IEC.61386	2421
Colour	Grey RAL 7011	Compression strength (N)	320 N
DN	NW16	Impact Strength (J)	6 J
Ø d1 (mm)	18.1	IP	IP65
Ø d2 (mm)	22.8	Working temperature range (°C)	-5 / 60 °C
R (mm)	24	Fire resistance	Flame retardant
kg/u	0,121		
u	25		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

