
PLASTIC 7035 System

TFA 7035 Conduit



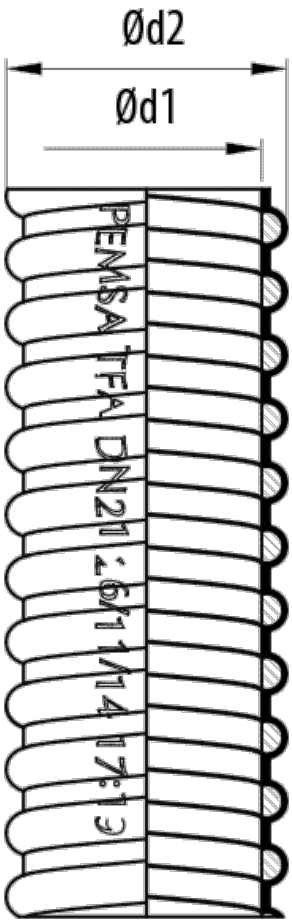

Description

TFA corrugated PVC flexible conduit for the protection of wiring in the tertiary sector. Flexible conduit with an internal rigid PVC spiral, watertight protection (IP65), compression strength of 320 N and impact resistance of 6 J. Available in grey (RAL 7035), in a wide variety of sizes.

Advantages

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials.

No flame propagation.

High degree of tightness with RGP or P fittings.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of flexible PVC and reinforced with a rigid spiral.

Applications

Suitable for the protection of wiring and conductors in building, tertiary sector, machinery and industry.

Solutions

SERVICE AND RETAIL

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TFA 7035 Conduit

Main technical characteristics

Colour Grey RAL 7035 | DN NW 9, NW11, NW13, NW16, NW21, NW29, NW36, NW48 | PVC | Cod IEC 61386 2421 | 320 N | 6 J

IP65 | -5 / 60 °C | Flame retardant | ETIM 10 EC001177

Product data

DN	Od1	Od2		REF	kg/u	
NW 9	11.8	15.7	16	10011209	0,071	25
NW11	14.7	18.7	20	10011211	0,079	25
NW13	16.8	20.7	22	10011213	0,106	25
NW16	18.1	22.8	24	10011216	0,121	25
NW21	23.6	28.9	30	10011221	0,166	25
NW29	30.5	37	38	10011229	0,252	25
NW36	40	47.2	48	10011236	0,382	25
NW48	53.1	60	60	10011248	0,418	20

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."