
PLASTIC 7035 System

30/10/2026

TFA 7035 Conduit (Ref: 10011209)



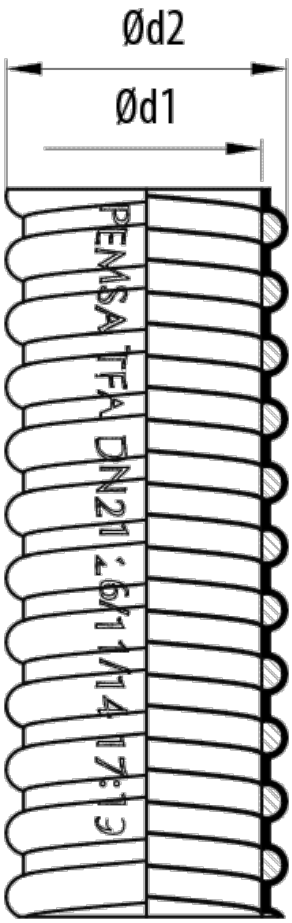

Description

TFA corrugated PVC flexible conduit for the protection of wiring in the tertiary sector. Flexible conduit with an internal rigid PVC spiral, watertight protection (IP65), compression strength of 320 N and impact resistance of 6 J. Available in grey (RAL 7035), in a wide variety of sizes.

Advantages

High degree of tightness with RGP or P fittings.

High aesthetic component. RAL 7035 grey same as the other conduits or electrical materials.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Made of flexible PVC and reinforced with a rigid spiral.

No flame propagation.

Applications

Suitable for the protection of wiring and conductors in building, tertiary sector, machinery and industry.

Solutions

SERVICE AND RETAIL

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TFA 7035 Conduit (Ref: 10011209)

Product data

ETIM 10	EC001177	**Material**	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Cod. IEC.61386**	2421
Colour	Grey RAL 7035	**Compression strength (N)**	320 N
DN	NW 9	**Impact Strength (J)**	6 J
Ø d1 (mm)	11.8	**IP**	IP65
Ø d2 (mm)	15.7	**Working temperature range (°C)**	-5 / 60 °C
R (mm)	16	**Fire resistance**	Flame retardant
kg/u	0,071		
u	25		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."